


- Spalva: chrome
- metal lever
- ceramic headparts 1/2", 90°
- GROHE Long-Life finish
- GROHE Water Saving - Less water, perfect flow
- maximum flow rate (at 3 bar): 5 l/min
- GROHE FastFixation installation system
- pop-up waste set 1 1/4"
- pressure-proof, flexible connection hoses between spout and side valves
- min. recommended pressure 1.0 bar
- union nut 1/2" x 10.5 mm



## 20 304 001 LINEARE THREE-HOLE BASIN MIXER 1/2" M-SIZE

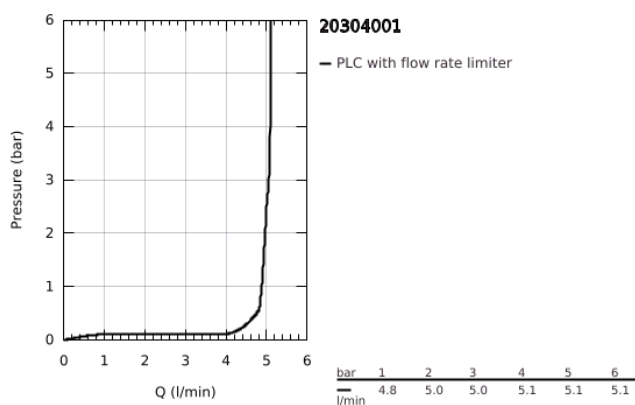

**ATSARGINĖS DALYS** , liepos 2016 – dabar

- 1: Handle pair (Produkto nr. 48357000)
- 2: Ceramic headpart, 1/2" (Produkto nr. 45882000)
- 2.1: O-ring Ø 18.2 x Ø 1.7 (Produkto nr. 0392400M)
- 3: Ceramic headpart, 1/2" (Produkto nr. 45883000)
- 3.1: O-ring Ø 18.2 x Ø 1.7 (Produkto nr. 0392400M)
- 4: Coupling nut 1/2" x 14.5 mm (Produkto nr. 1290200M)
- 4.1: Fibre seal Ø 18,5 x Ø 12 x 2 (Produkto nr. 0138900M)
- 5: Pop-up rod (Produkto nr. 65196000)
- 6: Mousseur (Produkto nr. 13994000)
- 7: Shank mounting kit (Produkto nr. 46671000)
- 8: Flexible connection hose (Produkto nr. 45704000)
- 9: Waste set 1 1/4" (Produkto nr. 28910000)
- 9.1: Plug (Produkto nr. 07182000)
- 9.2: Eccentric rod (Produkto nr. 07052000)
- 10: Mounting wrench (Produkto nr. 19017000)\*
- 11: Coupling nut 1/2" (Produkto nr. 1290100M)\*
- 12: Eccentric rod (Produkto nr. 07341000)\*

\* pasirenkami priedai